

In-Sight SnAPP Series

Vision Sensors for Automated Detection



In-Sight SnAPP Series

Stable detection for any application

The In-Sight® SnAPP vision sensor allows manufacturers to quickly automate processes and quality control tasks, with no experience needed. Using pre-trained AI, these easy-to-use sensors solve a range of error-proofing applications to ensure peak machine performance, support predictive maintenance, and enable continuous improvement.

Accurate detection optimizes application performance

→ PAGE 5

High ease of use simplifies installation and offers fast deployment

→ PAGE 6

Flexible capability solves a range of inspection tasks

→ PAGE 7




Key features




Embedded AI

Simplify setup and find subtle, variable anomalies.

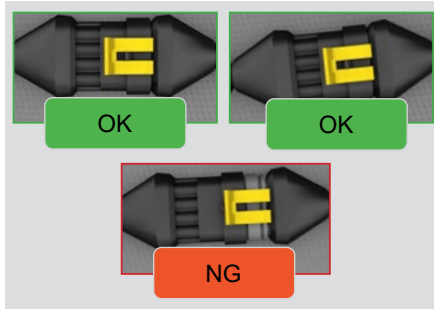

Example-based training

Train jobs using just a few sample images.

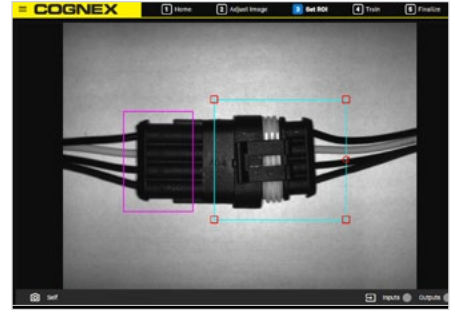


Web-based user interface

Plug in and run In-Sight SnAPP from anywhere, no software needed.



Real-time training feedback

View results in real-time to verify performance and identify potential issues early.

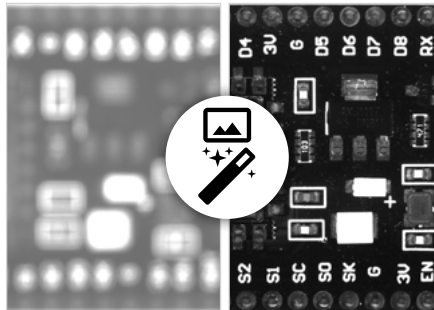

1-click image optimization

Capture high-resolution images, in a single click.




Web HMI compatibility

Train and monitor applications directly on the factory floor, without a PC.



Compact size

Easily add automation anywhere in your facility.

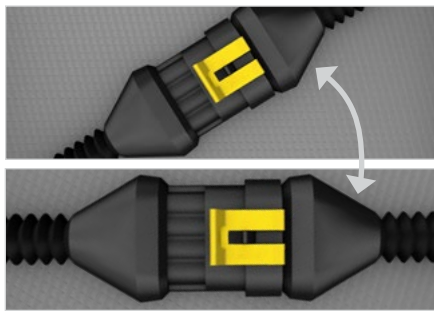

Fixturing capabilities

Fixture your region of interest to locate parts and features in any position.




IP67 rated

Operate in challenging manufacturing environments.

Overcome the limitations of lasers with vision-based technology


Upgrade your automation with vision sensors

Vision sensors outperform laser technology to offer higher detection rates, while simplifying setup and maintenance and allowing users to future-proof their operations.

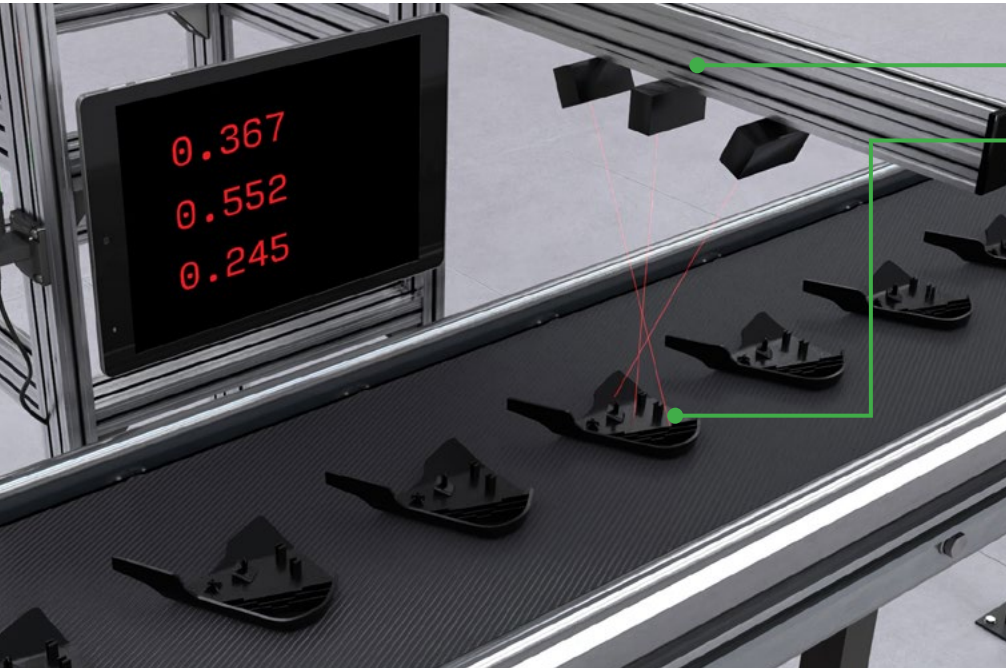

✘ Limitations of laser sensors

- **Multi-device setup** increases maintenance time and costs
- **Narrow region of interest** means alignment must be on target
- Knowledge of **mechanical fixturing** required
- Use case is **presence/absence detection**, only

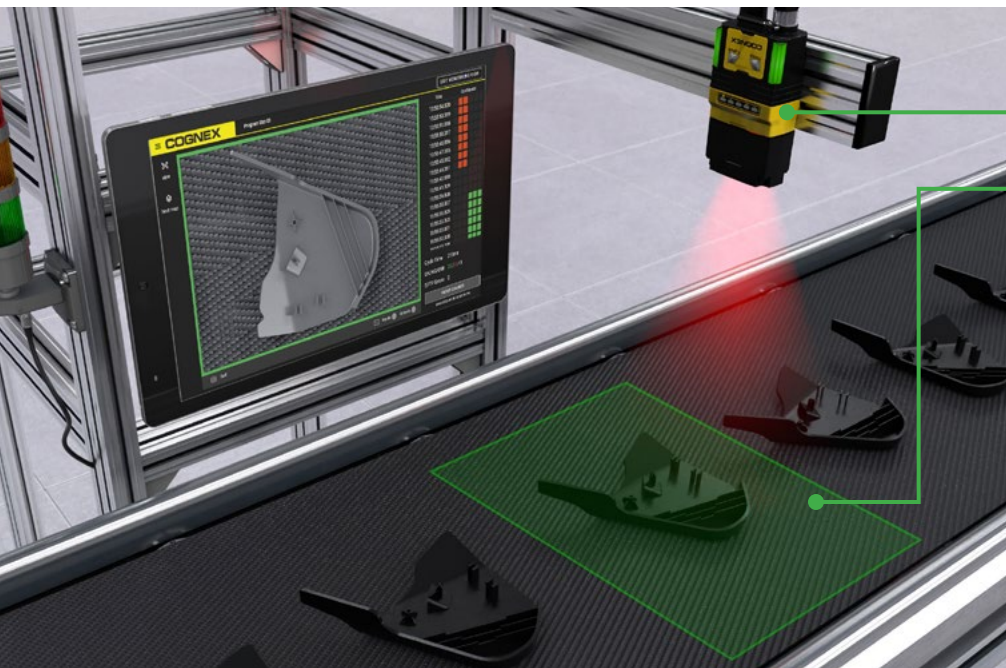

✔ Benefits of SnAPP vision sensor


- **Single device setup** pinpoints source of errors for faster, easier maintenance
- **Wide region of interest** handles misalignment and positional changes
- **No technical expertise** required
- **Wide range** of use cases, including:
 - Presence/absence detection
 - Quality and process inspections
 - Sortation
 - Assembly verification
 - Optical character recognition
 - Counting

Accurate detection


Optimize machine performance and ensure automated processes are working properly

Image-based detection and embedded AI exceed the capabilities of conventional sensors, like photoelectric, proximity, and optical sensors, and allow you to:

Find subtle anomalies

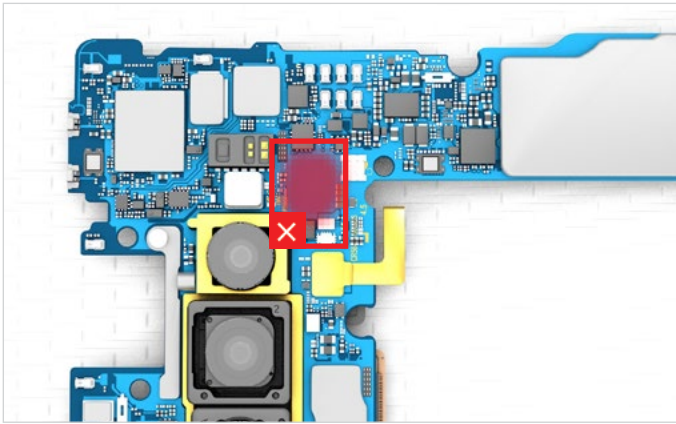


Eliminate false positives/negatives

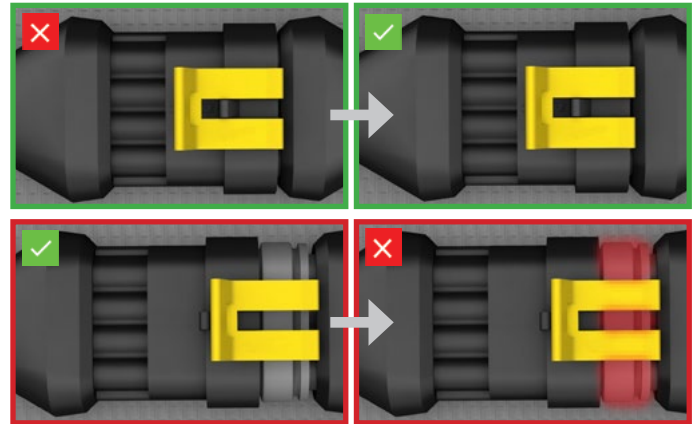

Handle variation



Locate features and parts in any position

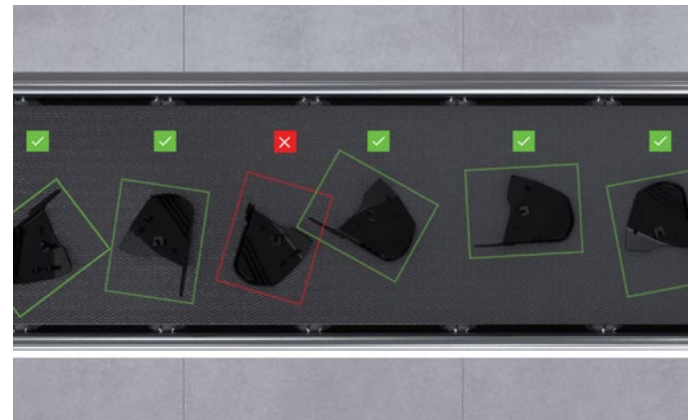

Higher detection rates

- ✓ More accurate inspections
- ✓ More consistent product quality
- ✓ More reliable machine performance

High ease of use

Go from unboxing to automating your line in minutes

Solve your application in 5 quick steps

- 1 Find the device and open the home screen.
- 2 Adjust image and define acquisition area.
- 3 Set the region of interest.
- 4 Label training images.
- 5 Select trigger mode settings and enter the monitoring view.

The screenshot shows the COGNEX In-Sight SnAPP software interface. At the top, a navigation bar contains five numbered steps: 1 Home, 2 Adjust Image, 3 Set ROI, 4 Train, and 5 Finalize. A 'PROCEED' button is located to the right of the navigation bar. The main area is divided into three sections: a left sidebar with 'view' and 'heat map' icons, a central camera view showing a connector with a red ROI and a yellow arrow pointing to a feature, and a right-side control panel. The control panel includes 'OK' and 'NG' buttons, each with a count of 3, and a 'Label more OK and NG Images' button. At the bottom right, there is a 'UNTRAIN ANOMALY DETECTOR' button. The bottom of the interface has a 'Self' camera icon and 'Inputs' and 'Outputs' toggle buttons.

Fast, intuitive training

Guided setup walks you step-by-step through building your application.

Set the **Region of Interest** by moving and resizing the rectangle to fit the area you need to inspect.


If the location of the parts is not fixed, enable fixturing by switching on the **Fixturing** toggle.

Fixturing

A fixture anchors the ROI to a feature on your part. Fixturing gives you accurate readings with changing part positions.

Simplified installation and retrofits

Modify applications or build new ones within the UI, no hardware exchange needed.



Get started

Setting up your In-Sight SnAPP is easy with online, self-service support options. Choose from a variety of how-to videos and training materials to get up-and-running quickly.




www.cognex.com/in-sight-snapp-support

Flexible functionality


Do more than ever before with a sensor

Anomaly Detector

Verify marks and imprints on parts

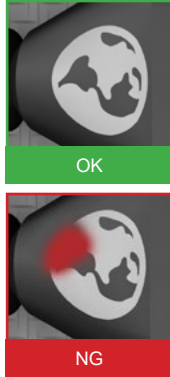


Inspect packaged items for debris

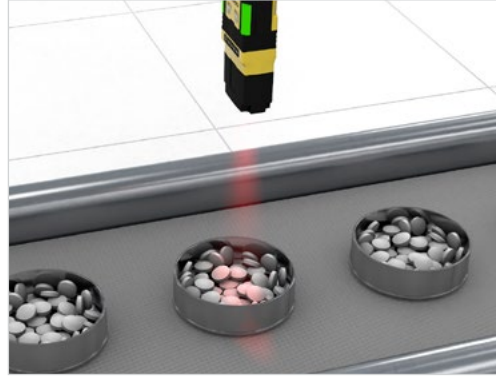

2-Class and 4-Class Classifier

Confirm presence/absence of parts


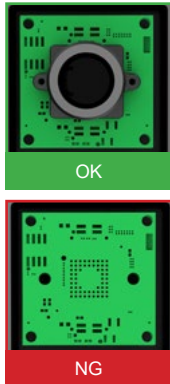


Inspect labels on final packaging




Counter

Count parts, even against reflective surfaces

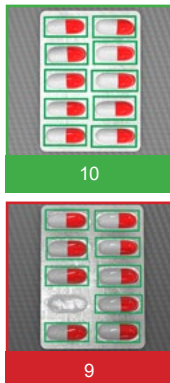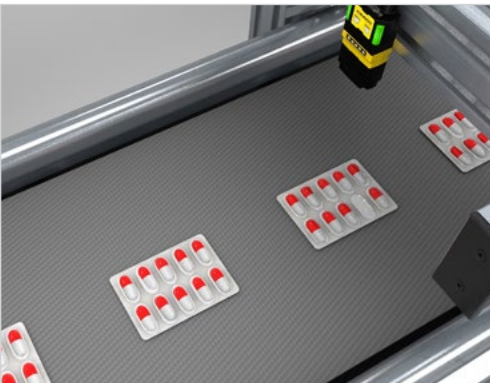

Verify proper assembly

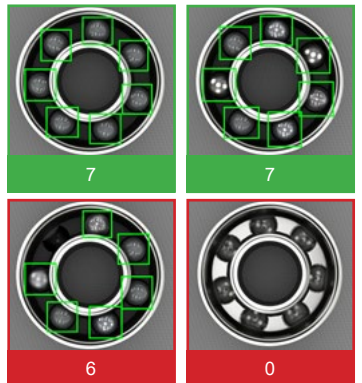


In-Sight SnAPP Specifications

Weight	6.2 mm: 141 g 16 mm: 169 g Right angle configuration adds 50 g
Power	24 V DC +/- 10%, and Power over Ethernet (PoE Class 3)
Power Consumption	≤7.5W
Operating Temperature	0–40 °C (32–104 °F)
Storage Temperature	-10–60 °C (14–140 °F)
Humidity	<95% non-condensing
Environmental	IP67
Shock (Shipping and Storage)	IEC 60068-2-27: 1000 shocks, semi-sinusoidal, 11 g, 10 ms ISTA-1A Standardized Testing - Packaged Products 150 lb or less
Vibration (Shipping and Storage)	IEC 60068-2-6: vibration test in each of the three main axis for 2 hours @ 10 Gs (10 to 500 Hz at 100m/s ² / 15 mm) FedEx Vibration Testing for packaged products 150 lbs or less
High-Speed Outputs 0, 1, 2, 3	I_{MAX} : 50 mA V_{OL} : ≤ ± 3 V @ 50 mA
Inputs 0 (Trigger), 1, 2, 3	V_{IL} : ≤ ± 6 V V_{IH} : ≥ ± 12 V I_{TYP} : 4.2 mA @ 24 V
Ethernet	10/100/1000. Full duplex or half duplex.
Program Storage	20 for each Application
Image Sensor	1/2.8-inch CMOS monochrome and color
Image Sensor Properties	Pixel size: 2.8 μm (H) x 2.8 μm (V)
Image Resolution (pixels)	1440 x 1080 (1.6 MP)
Lens Type	Autofocus: 6.2 mm, 16 mm (High Speed Liquid Lens)


Field of view diagrams

Working distances
Units: mm (*in*)

SP2801 with 6.2 mm lens

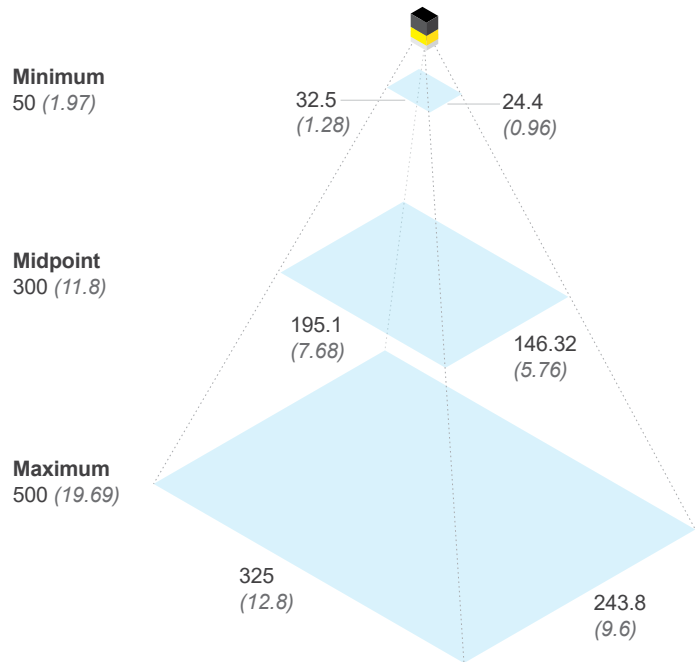

SP2801 with 16 mm lens

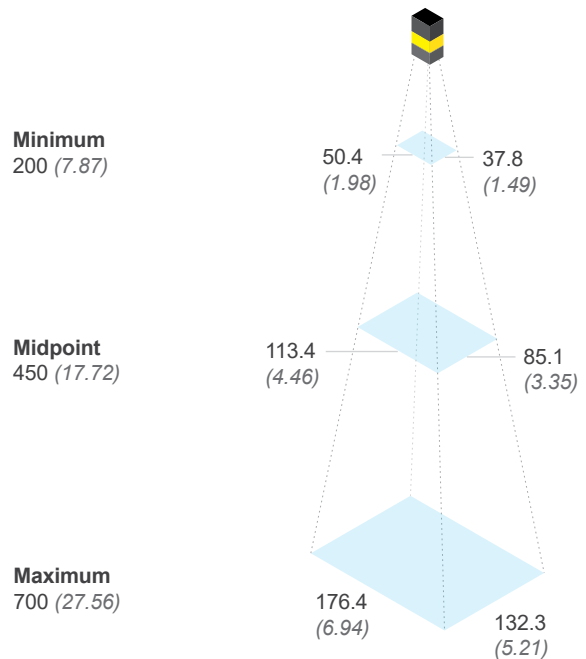




Product IDs and descriptions

In-Sight SnAPP							
	Product ID	Resolution	Mono/Color	Configuration	Lens	Light	Toolset
	SP2801MR-WR-2C	1.6 MP	Mono	Angled	6.2 mm HSSL	Red	2-Class Classifier
	SP2801CW-WR-2C	1.6 MP	Color	Angled	6.2 mm HSSL	White	2-Class Classifier
	SP2801MR-WR-4C	1.6 MP	Mono	Angled	6.2 mm HSSL	Red	4-Class Classifier
	SP2801CW-WR-4C	1.6 MP	Color	Angled	6.2 mm HSSL	White	4-Class Classifier
	SP2801MR-WR-CT	1.6 MP	Mono	Angled	6.2 mm HSSL	Red	Counter
	SP2801CW-WR-CT	1.6 MP	Color	Angled	6.2 mm HSSL	White	Counter
	SP2801MR-WR-AL	1.6 MP	Mono	Angled	6.2 mm HSSL	Red	All applications
	SP2801CW-WR-AL	1.6 MP	Color	Angled	6.2 mm HSSL	White	All applications
	SP2801MR-NS-2C	1.6 MP	Mono	Straight	16 mm HSSL	Red	2-Class Classifier
	SP2801CW-NS-2C	1.6 MP	Color	Straight	16 mm HSSL	White	2-Class Classifier
	SP2801MR-NS-4C	1.6 MP	Mono	Straight	16 mm HSSL	Red	4-Class Classifier
	SP2801CW-NS-4C	1.6 MP	Color	Straight	16 mm HSSL	White	4-Class Classifier
	SP2801MR-NS-CT	1.6 MP	Mono	Straight	16 mm HSSL	Red	Counter
	SP2801CW-NS-CT	1.6 MP	Color	Straight	16 mm HSSL	White	Counter
	SP2801MR-NS-AL	1.6 MP	Mono	Straight	16 mm HSSL	Red	All applications
	SP2801CW-NS-AL	1.6 MP	Color	Straight	16 mm HSSL	White	All applications

Components and accessories

Mounting Brackets

	Product ID	Description
	DM100-UBRK-000	Universal mounting bracket
	DM100-PIVOTM-01	Pivot mounting bracket
	DMBK-DMPIVOT-00	Tilted angle pivot bracket



Set up applications, directly on the factory floor, with VisionView

VisionView is a display panel that allows you to quickly train, update, and monitor jobs on the production line, without the need for a PC. Having this technology on the factory floor improves efficiency, facilitates easy device management, and provides real-time feedback for immediate process improvements.



www.cognex.com/VisionView


Cables

	Product ID	Description
	CCB-84901-2001-XX	Ethernet cable, X-coded M12-8 to RJ-45, straight (2m, 5m, 10m, 15m, 30m)
	CCB-84901-2002-XX	Ethernet cable, X-coded M12-8 to RJ-45, right-angled (2m, 5m, 10m)
	CCB-84901-2RBT-XX	Ethernet cable, robotic X-coded M12-8 to RJ-45, straight (2m, 5m, 10m)
	CCB-M12X8MS-XCAC	X-coded to A-coded Ethernet cable adapter (5m, 10m, 15m)
	CCB-PWRIO-XX	Power and I/O breakout cable, M12-12 to flying lead
	CCB-PWRIO-XXR	Power and I/O breakout cable, M12-12 to flying lead, right-angled (5m, 10m, 15m)
	CKR-200-CBL-EXT	I/O extension cable

Dimensions Units: mm, [in]


With 16 mm lens

[Download CAD files](#)

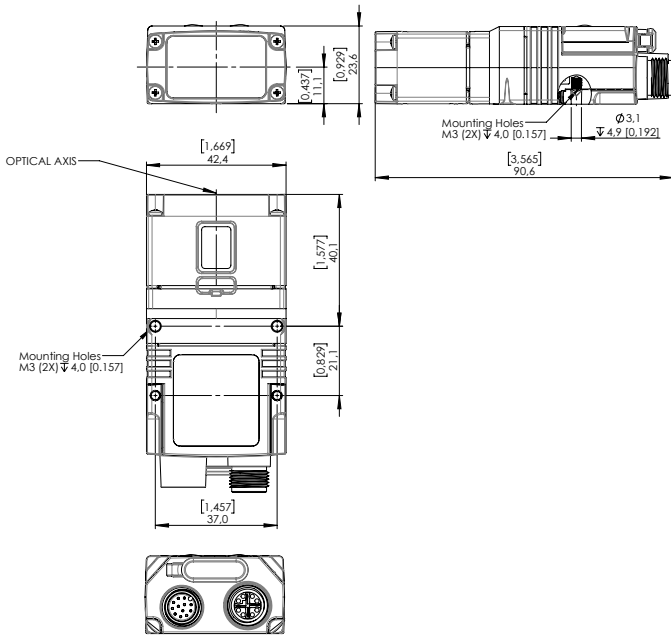


With 6.2 mm lens

[Download CAD files](#)

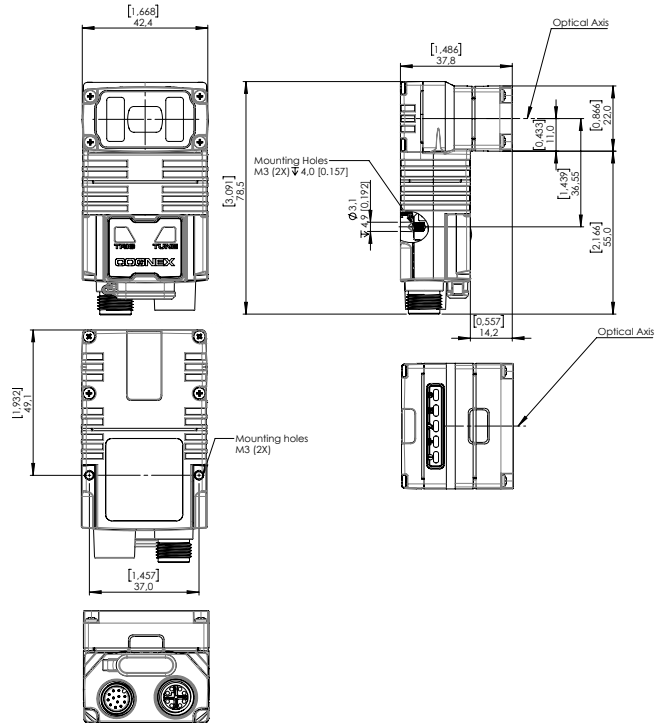

A solution for every need

With a familiar user experience, easily transition to another product within the Cognex portfolio as your needs change. We have a wide range of solutions to support you as your business grows and your application requirements evolve.

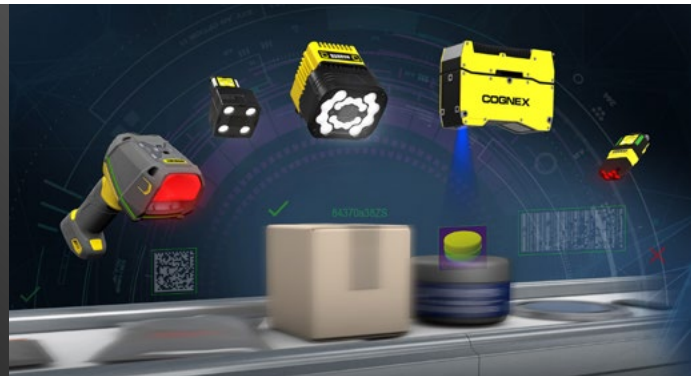

COGNEX

Companies around the world rely on Cognex vision and barcode reading solutions to optimize quality, drive down costs and control traceability.

Corporate Headquarters One Vision Drive Natick, MA 01760 USA

Regional Sales Offices

Americas

North America +1 844 999 2469
 Brazil +55 11 4210 3919
 Mexico +800 733 4116

Europe

Austria +43 800 28 16 32
 Belgium +32 289 370 75
 Czechia +420 800 023 519
 France +33 1 76 54 93 18
 Germany +49 721 958 8052
 Hungary +36 800 80291

Ireland +353 21 421 7500
 Italy +39 02 3057 8196
 Netherlands +31 207 941 398
 Poland +48 717 121 086
 Romania +40 741 041 272
 Spain +34 93 299 28 14
 Sweden +46 21 14 55 88
 Switzerland +41 445 788 877
 Turkey +90 216 900 1696
 United Kingdom +44 121 29 65 163

Asia-Pacific

Australia +61 2 7202 6910
 China +86 21 5875 1133

India +91 7305 040397
 Indonesia +62 21 3076 1792
 Japan +81 3 5977 5400
 Korea +82 2 539 9047
 Malaysia +6019 916 5532
 New Zealand +64 9 802 0555
 Phillipines +63 2 8539 3990
 Singapore +65 3158 3322
 Taiwan +886 02 7703 2848
 Thailand +66 6 3230 9998
 Vietnam +84 98 2405167

© Copyright 2024, Cognex Corporation. All information in this document is subject to change without notice. All Rights Reserved. Cognex and In-Sight are registered trademarks of Cognex Corporation. All other trademarks are property of their respective owners. Lit. No. ISSNPDS-05-2024-EN

www.cognex.com